




# Disassembling Nokia E61i Front Cover

Written By: Christopher Patton



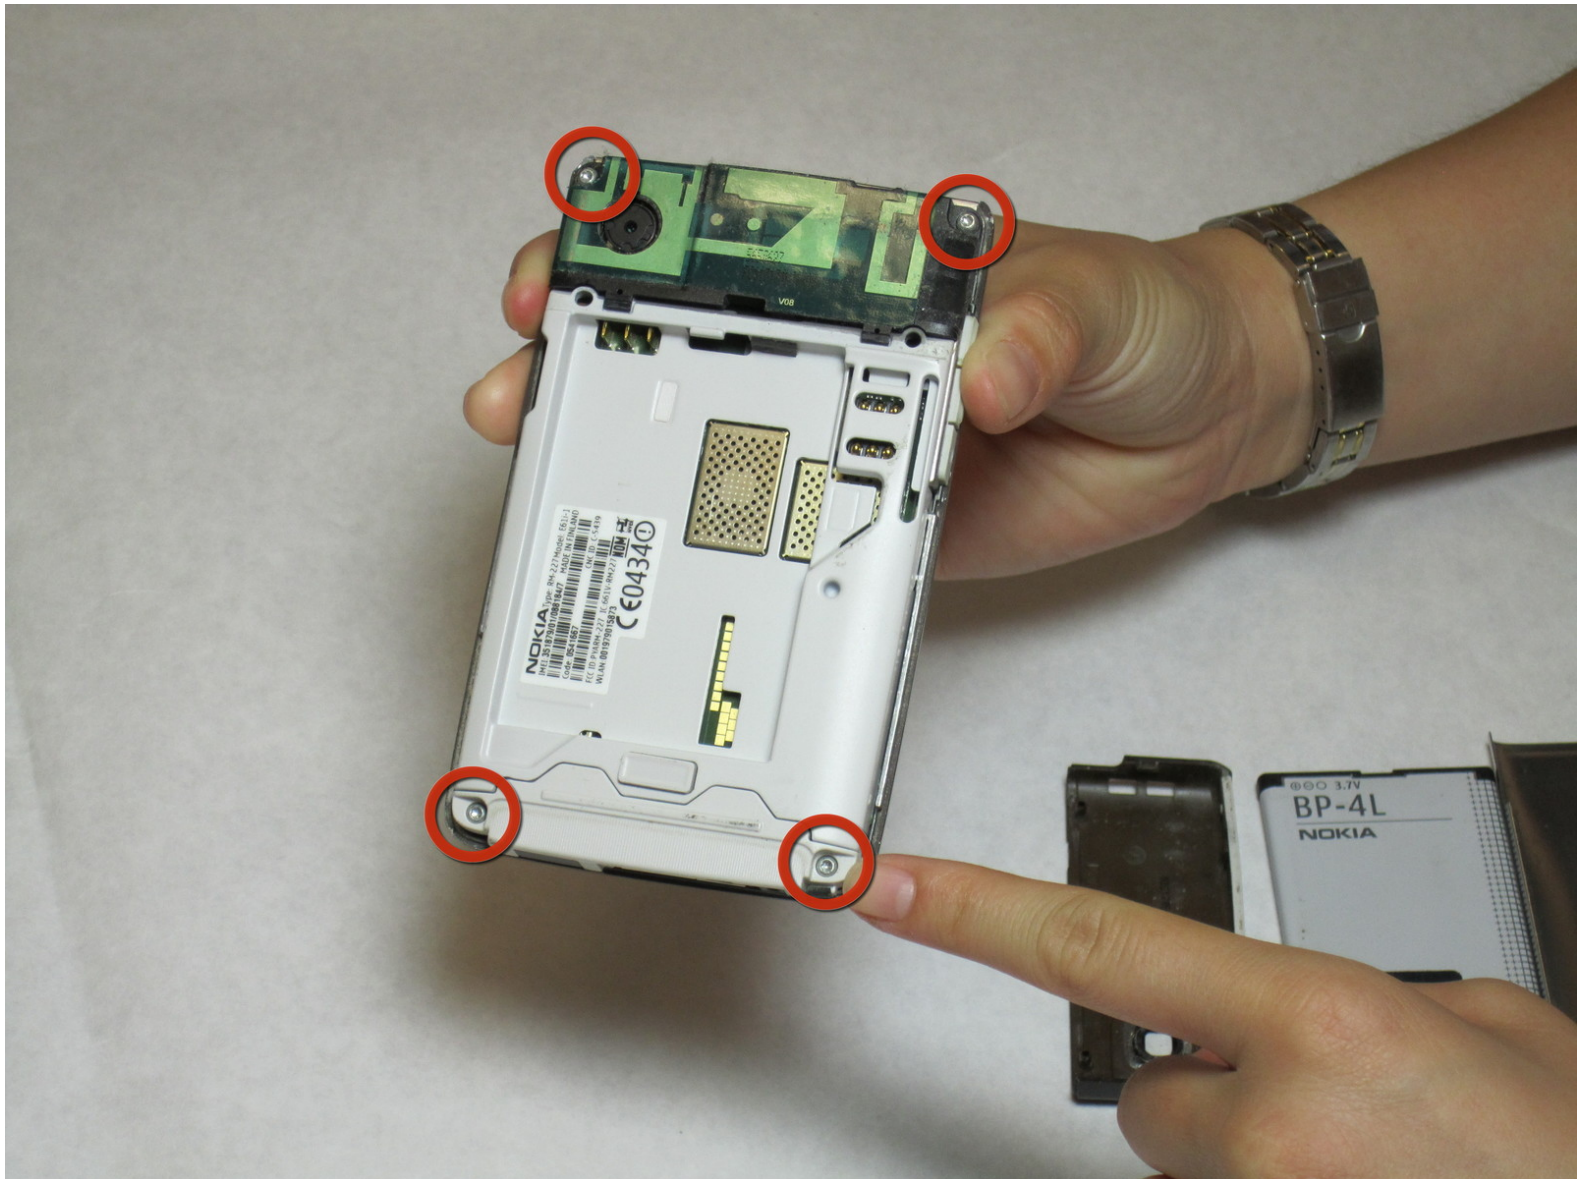

## TOOLS:


- [T7 Torx Screwdriver](#) (1)
-

## Step 1 — Battery



- To access the battery you must remove the back cover. Press the tab on the bottom of the cover in so that the back cover plate can slide over it.
- Now slide the back cover off of the phone.


## Step 2

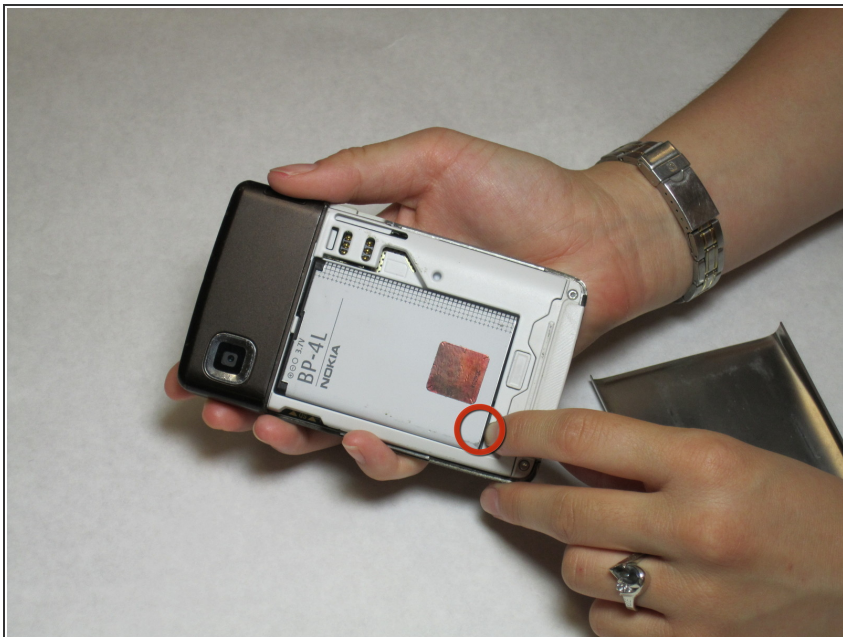

- Once the backplate is removed, look to the bottom-left corner of the phone where there is a spot to remove the battery.





## Step 3

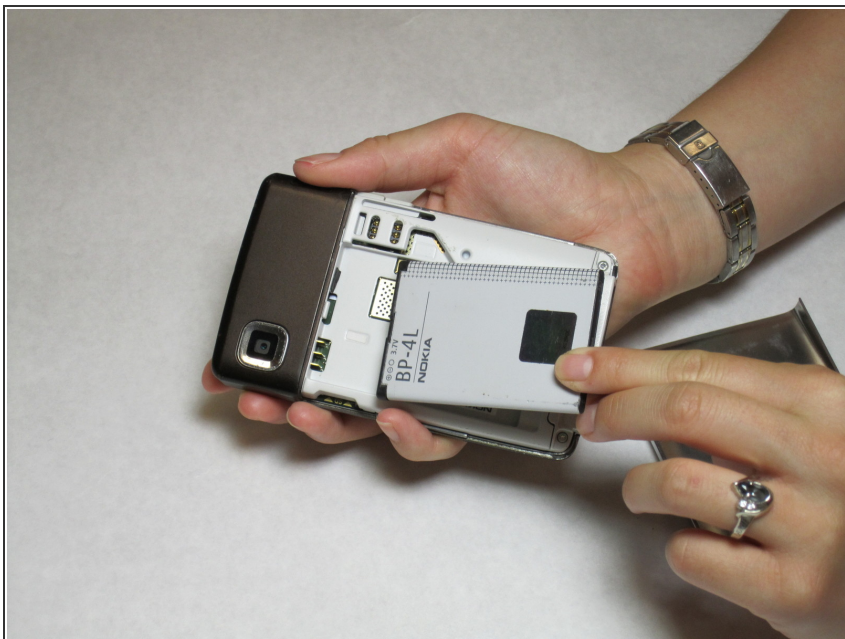

- Use your finger to lift the battery out.
- ❗ The E61i uses a Nokia BP-4L standard battery.

## Step 4 — Front Cover

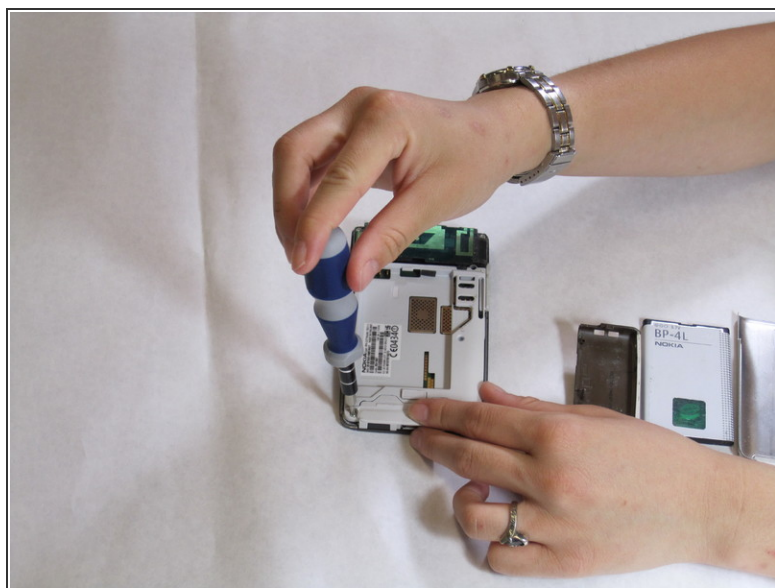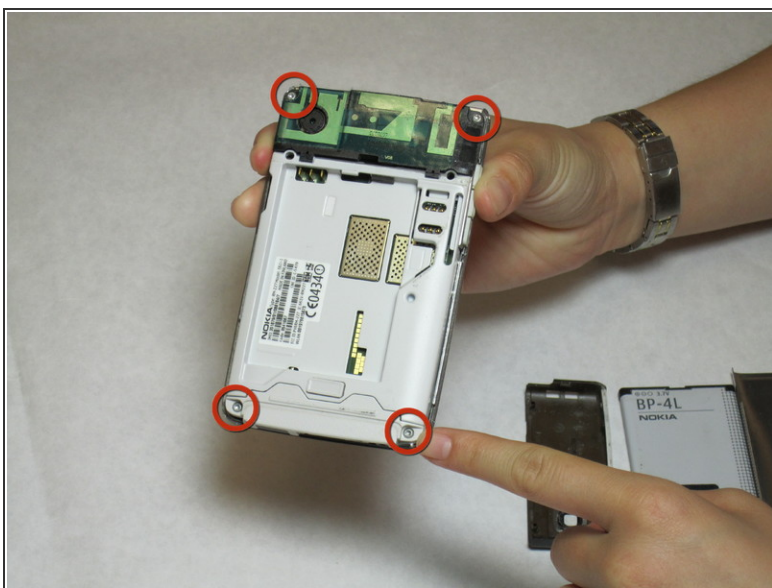

- Remove the four screws securing the front cover to the rest of the phone using a T7 screwdriver.

## Step 5



- After the screws have been removed, there is nothing else securing the front cover to the rest of the phone. Simply remove the cover by pulling it up and off.

---

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-21 06:49:32 AM.